


## Features

- System designed to be installed over wall finish
- Snap-fit design for easy installation
- System allows minor seismic movements
- Suitable for internal / external applications
- For excellent result, choose to powder coat the cover plate to match neighboring wall finish
- Fire Barriers are optionally available

### Straight Application HKS

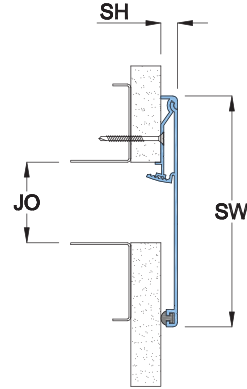

Powder Coat Finish:



Anodized Finishes:



**HK**  
Series

**INT.**  
Application


**EXT.**  
Application

**Seismic**  
Movement

**WALL**  
USE

**CEILING**  
USE

### Corner Application HKC

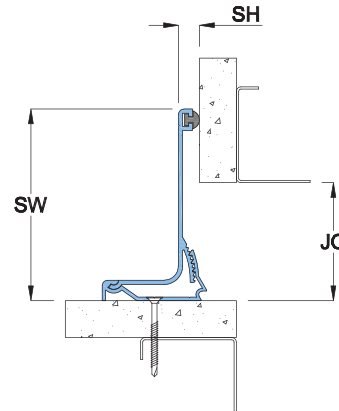

## Details

Usage : Wall/Ceiling

Joint width : 1" - 4"

Optional : Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Horizontal	Vertical	Shear	
Straight (S)	HKS 01	25	10	79	50	13	Minor	*
	HKS 02	51	10	117	50	13	Minor	*
	HKS 03	76	10	156	50	13	Minor	*
	HKS 04	102	10	194	50	13	Minor	*
Corner (C)	HKC 01	25	10	44	50	13	Minor	*
	HKC 02	51	10	83	50	13	Minor	*
	HKC 03	76	10	121	50	13	Minor	*
	HKC 04	102	10	159	50	13	Minor	*

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.