


Features

- System designed to be installed in recessed external wall
- Seismic Pan System for accommodating various wall finishes
- Accommodate large joints with seismic movements
- Suitable for aluminum claddings, curtain walls or any infill is required
- System joint cover combined with aluminum frame and a pan type cover
- System cover is firmly support in place with magnet assemblies
- System allows full seismic movements
- System allows excellent shear movements

Straight Application EWS

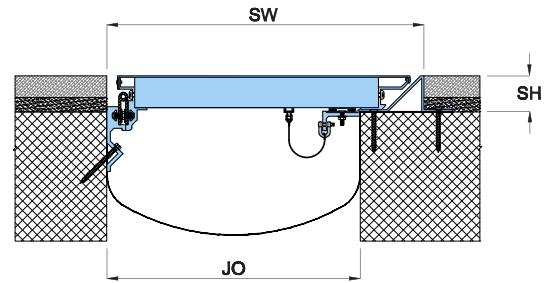


EW Series

EXT. Application

Seismic Movement

Wall USE

Corner Application EWC

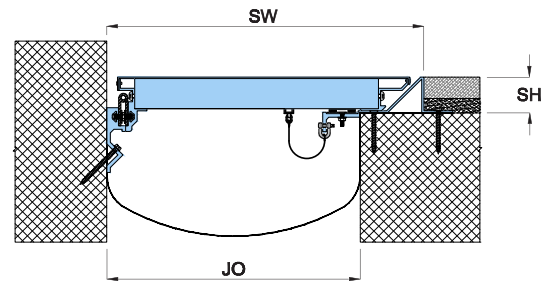

Details

Usage : External Wall

Joint width (mm) : 200 - 600

Optional : Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Horizontal	Vertical	Shear	
Straight (S)	EWS 200	200	50	300	100	100	Excellent	*
	EWS 250	250	50	300	100	100	Excellent	*
	EWS 300	300	50	400	100	100	Excellent	*
	EWS 350	350	50	450	100	100	Excellent	*
	EWS 400	400	50	500	100	100	Excellent	*
	EWS 450	450	50	500	100	100	Excellent	*
	EWS 500	500	50	600	100	100	Excellent	*
	EWS 550	550	50	600	100	100	Excellent	*
	EWS 600	600	50	700	100	100	Excellent	*
Corner (C)	EWC 200	200	50	300	100	100	Excellent	*
	EWC 250	250	50	300	100	100	Excellent	*
	EWC 300	300	50	400	100	100	Excellent	*
	EWC 350	350	50	400	100	100	Excellent	*
	EWC 400	400	50	500	100	100	Excellent	*
	EWC 450	450	50	500	100	100	Excellent	*
	EWC 500	500	50	600	100	100	Excellent	*
	EWC 550	550	50	600	100	100	Excellent	*
	EWC 600	600	50	700	100	100	Excellent	*