

## Features

- System designed to be installed over finishes
- Heavy duty laminated rubber joint
- Ideal for vehicular traffic
- Steel reinforced core designed to withstand heavy traffic
- System allows full seismic movements
- UV stabilized
- Acid and Alkali resistant
- System designed for easy maintenance and repair

### Straight Application HBS

**HB**  
Series


**EXT.**  
Application

**Heavy**  
Duty

**Seismic**  
Movement

**Thermal**  
Movement

**FLOOR**  
USE

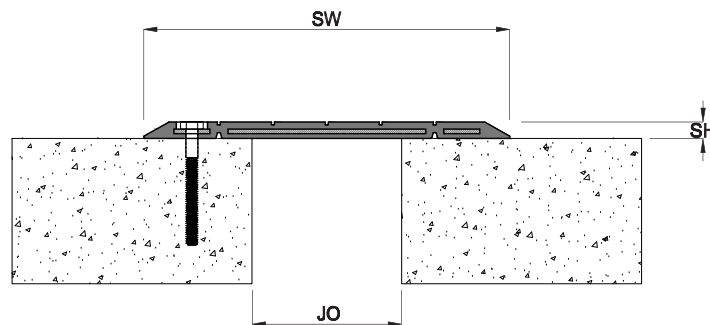

## Details

Usage : Floor

---

Joint width (mm) : 75 - 225

---

Optional : Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)		Load (Ton)
		Millimeter			Horizontal	Shear	
Straight (S)	HBS 075	75	14	225	50	*	Heavy Duty
	HBS 125	125	14	305	50	*	Heavy Duty
	HBS 175	175	14	355	50	*	Heavy Duty
	HBS 225	225	14	405	50	*	Heavy Duty