

### Features

- System designed for installation in concrete recess
- Firmly fixed Santoprene gasket is ideal for movement tractability without shearing or breaking
- System is suitable for minor seismic movements  
Allows narrow shear movement
- Commonly used system that is easy to install and maintain
- Brass / Stainless Steel decorative caps are optionally available
- Vapor and Fire Barriers are optionally available

#### Straight Application ABS




**AB**  
Series

**INT.**  
Application

**Thermal**  
Movement

**WALL**  
USE

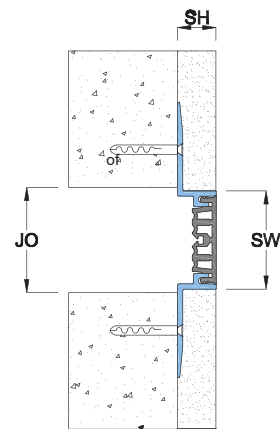

Seal  
Colors:


BK

BG

WH

GY

#### Corner Application ABC

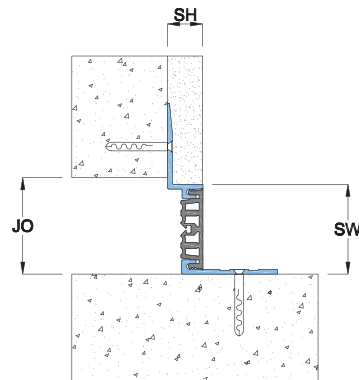

### Details

Usage : Wall

Joint width : 1" - 3"

Optional : Vapor/Fire Barrier  
Brass/SS caps

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	ABS 01	25	19	25	25	25	Narrow	*
	ABS 02	51	19	48	25	25	Narrow	*
	ABS 03	76	19	73	25	25	Narrow	*
Corner (C)	ABC 01	25	19	25	25	25	Narrow	*
	ABC 02	51	19	48	25	25	Narrow	*
	ABC 03	76	19	73	25	25	Narrow	*

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.