
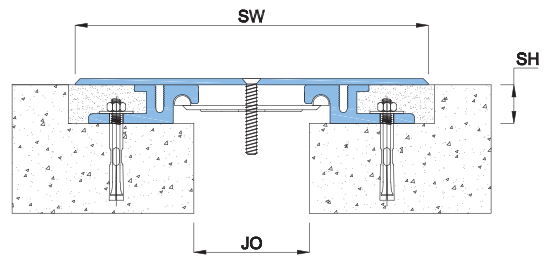


Features

- System designed to be installed in floor / wall recess
- Central plate of construction grade aluminium accommodates various floor finishes
- Steel central flanges allows swift shift between positive and negative movements
- System allows full seismic movements
- System allows excellent shear movements
- Load rated for heavy vehicular traffic
- Vapor and Fire Barriers are optionally available

Straight Application GAS

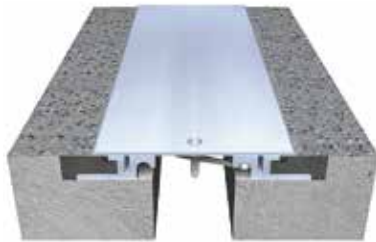

GA Series

EXT. Application



INT. Application

Seismic Movement

FLOOR USE

WALL USE

Corner Application GAC

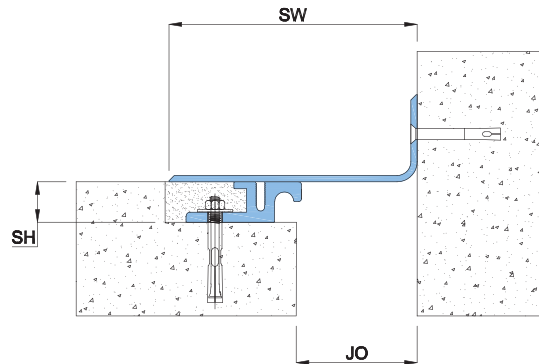

Details

Usage : Floor/Wall

Joint width : 2" - 12"

Optional : Vapor/Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Horizontal	Vertical	Shear	
Straight (S)	GAS 02	51	25	150	50	50	Excellent	3
	GAS 03	76	25	185	50	50	Excellent	3
	GAS 04	102	25	220	50	50	Excellent	3
	GAS 06	152	25	300	50	50	Excellent	2
	GAS 08	203	25	375	50	50	Excellent	2
	GAS 10	254	25	460	50	50	Excellent	2
Corner (C)	GAS 12	305	25	525	50	50	Excellent	2
	GAC 02	51	25	100	50	13	Excellent	3
	GAC 03	76	25	130	50	13	Excellent	3
	GAC 04	102	25	170	50	13	Excellent	3
	GAC 06	152	25	245	50	13	Excellent	2
	GAC 08	203	25	320	50	13	Excellent	2
	GAC 10	254	25	395	50	13	Excellent	2
GAC 12	305	25	475	50	13	Excellent	2	