
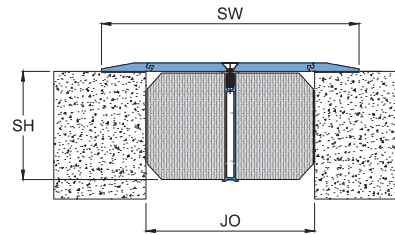




## Features

- System designed to be in surface mount installation
- Construction grade sand-blasted aluminum cover plate
- Compression seal convenient, durable, waterproof expansion joint
- System allows full seismic movements
- System allows excellent shear movements
- Load rated for heavy vehicular traffic
- Fire Barriers is optionally available

### Straight Application GHS

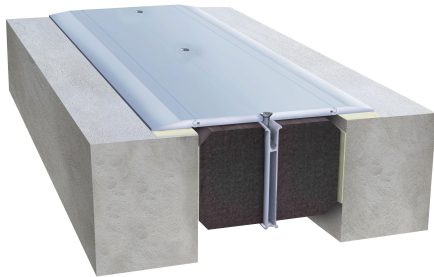

### Corner Application GHC

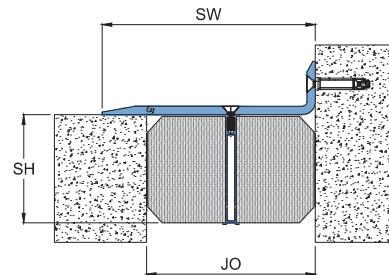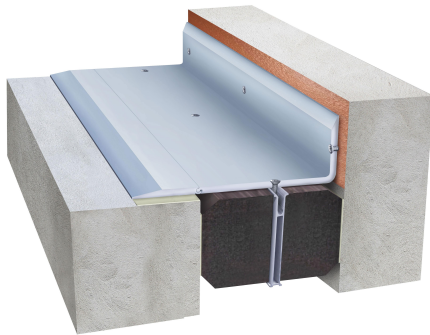

GH Series

EXT. Application

INT. Application

Seismic Movement

FLOOR USE

Application	Code	JO	SH	SW	± Movement (%)			Load
					Millimeter			
					Horizontal	Vertical	Shear	
Straight (S)	GHS 01	25	50	38	50	*	Excellent	Vehicular
	GHS 02	51	50	76	50	*	Excellent	Vehicular
	GHS 03	76	50	114	50	*	Excellent	Vehicular
	GHS 04	102	129	152	50	50	Excellent	Vehicular
	GHS 06	152	129	229	50	33	Excellent	Vehicular
	GHS 08	203	129	305	50	25	Excellent	Vehicular
	GHS 10	254	129	381	50	40	Excellent	Vehicular
	GHS 12	305	129	457	50	33	Excellent	Vehicular
	GHS 16	406	129	610	50	25	Excellent	Vehicular
GHS 20	508	129	762	50	20	Excellent	Vehicular	
Corner (C)	GHC 01	25	50	32	25	*	Excellent	Vehicular
	GHC 02	51	50	64	25	*	Excellent	Vehicular
	GHC 03	76	50	95	25	*	Excellent	Vehicular
	GHC 04	102	129	127	25	*	Excellent	Vehicular
	GHC 06	152	129	191	25	*	Excellent	Vehicular
	GHC 08	203	129	254	25	*	Excellent	Vehicular
	GHC 10	254	129	318	25	*	Excellent	Vehicular
	GHC 12	305	129	381	25	*	Excellent	Vehicular
	GHC 16	406	129	508	25	*	Excellent	Vehicular
GHC 20	508	129	635	25	*	Excellent	Vehicular	

## Details

Usage : Floor

Joint width : 1" - 20"

Optional : Fire Barrier

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.