




Features

- System designed to be installed over finishes
- Construction Grade Aluminium / Stainless Steel & Brass options available
- System allows full seismic movements
- Heavy duty covers for carpark also available
- Fire Barriers are optionally available

Straight Application HAS

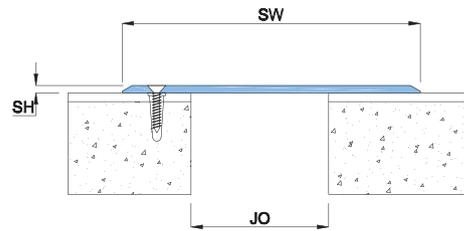

Corner Application HAC

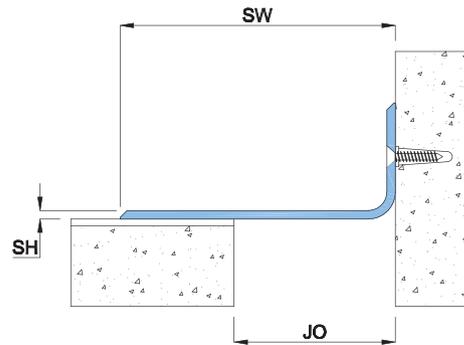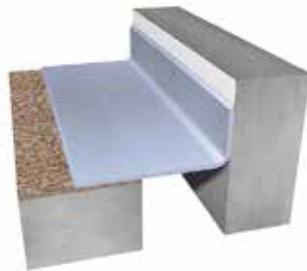

HA
Series

EXT.
Application

INT.
Application

Seismic
Movement

FLOOR
USE

WALL
USE

CEILING
USE

Corner Application HAC

Application	Code	JO	SH	SW	± Movement (%)		Load (Ton)
		Millimeter			Horizontal	Shear	
Straight (S)	HAS 01	25	3	75	50	*	2
	HAS 02	51	4	125	50	*	2
	HAS 03	76	4	165	50	*	2
	HAS 04	102	6	205	50	*	2
	HAS 06	152	6	295	50	*	1
	HAS 08	203	8	400	50	*	1
	HAS 10	254	8	480	50	*	1
HAS 12	305	10	590	50	*	1	
Corner (C)	HAC 01	25	3	50	50	*	2
	HAC 02	51	4	100	50	*	2
	HAC 03	76	4	130	50	*	2
	HAC 04	102	6	170	50	*	2
	HAC 06	152	6	245	50	*	1
	HAC 08	203	8	320	50	*	1
	HAC 10	254	8	395	50	*	1
HAC 12	305	10	475	50	*	1	

Details

Usage : Floor/Wall/Ceiling

Joint width : 1"- 12"

Optional : Fire Barrier