


Features

- Designed to be installed over finishes
- Stainless Steel spring assembly makes installation extremely easy
- Integrated with matching floor, wall and ceiling profiles for cohesive application
- Allows minor seismic movements
- Suitable for internal / external applications
- For excellent result, choose to powder coat the cover plate to match neighboring finishes
- Fire Barriers are optionally available
- Stainless Steel & Brass decorative cap available
- Allows excellent shear movements

Straight Application HDS

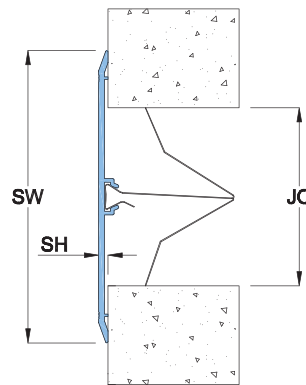

Powder Coat Finish
Any RALColor



Anodized
Finishes:



HD
Series

EXT.
Application

INT.
Application


Thermal
Movement

FLOOR
USE

WALL
USE

CEILING
USE

Corner Application HDC

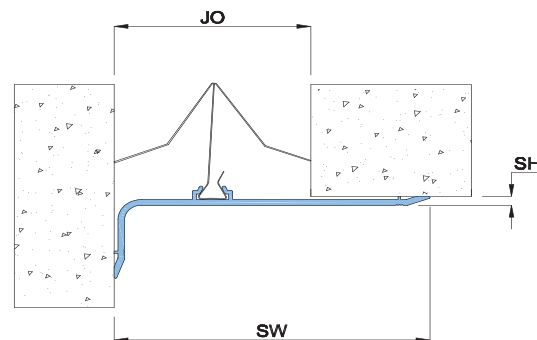

Details

Usage : Floor/Wall/Ceiling

Joint width : 1" - 6"

Optional : Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	HDS 01	25	4	60	50	25	Excellent	1.5
	HDS 02	51	4	85	50	25	Excellent	1.5
	HDS 03	76	4	123	50	25	Excellent	1.5
	HDS 04	102	4	152	50	25	Excellent	1.5
	HDS 06	152	4	220	50	25	Excellent	1.5
	Corner (C)	HDC 01	25	4	50	50	25	Excellent
HDC 02		51	4	83	50	25	Excellent	1.5
HDC 03		76	4	120	50	25	Excellent	1.5
HDC 04		102	4	150	50	25	Excellent	1.5
HDC 06		152	4	200	50	25	Excellent	1.5