


Features

- System design for external/internal floors
- Neoprene/EPDM Seal for car parks and bridge decks
- Provides excellent impermeability
- Excellent for seamless installation in curves and radius
- UV stabilized
- System allows excellent shear movements
- Use epoxy adhesive for secure installation
- Install on concrete up-stand for leveled installation
- System designed for easy installation using vacuum pump

Straight / Corner Application KDS

- KD Series**
- EXT. Application**
- INT. Application**
- Thermal Movement**
- FLOOR USE**

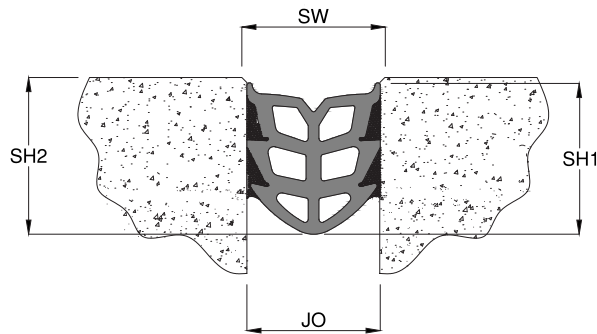

Details

Usage : Floor

Joint width : 0.4" - 04"

Optional : Fire Barrier (from 1" - 4")

Application	Code	JO	SW	SH1	SH2	+/- Movement (%)		Load (Ton)
		Millimeter				Horizontal	Vertical	
Straight / Corner	KDS 25	10	16	16	19	50	50	*
	KDS 35	15	18	16	19	50	50	*
	KDS 45	20	25	20	23	50	50	*
	KDS 01	25	34	30	33	50	50	*
	KDS 11	30	42	30	33	50	50	*
	KDS 02	51	63	45	48	50	50	*
	KDS 03	76	83	60	63	50	50	*
	KDS 04	102	115	85	88	50	50	*

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.