

Features

- System designed for bridge deck application
- Heavy duty joint suitable to withstand heavy rolling loads
- Made of construction grade aluminium 6063-T6
- Resistant to dynamic rolling loads and impacts
- System designed for easy maintenance and repair
- Number of steel anchors may differ depending on project condition
- Factory made transitions available

Bridge Deck Joint LAS

LA Series




EXT. Application

Heavy Duty

Water

Seismic Movement

FLOOR USE

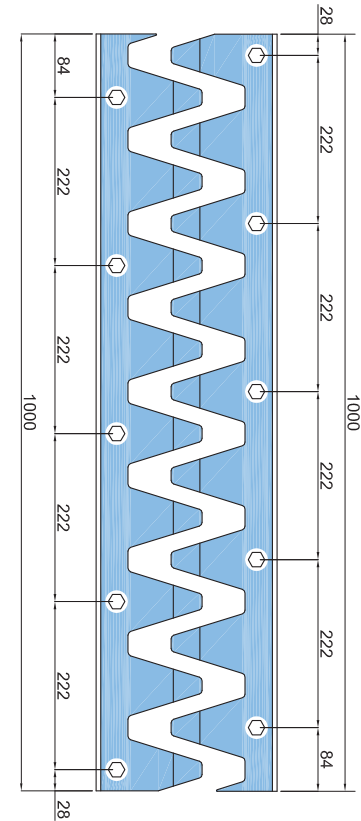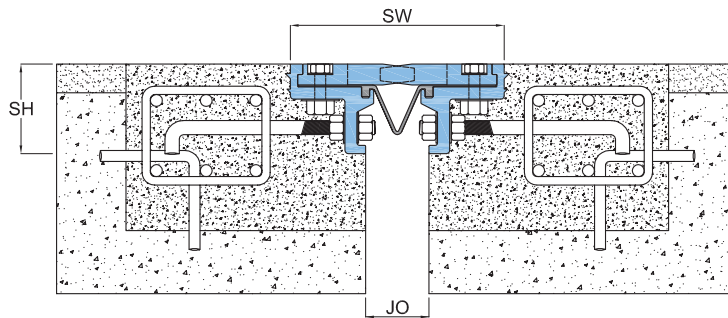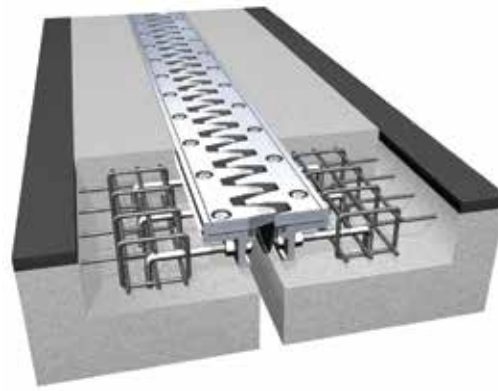

Details

Usage : Bridge Deck

Joint width : 2" - 8"

Optional : Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Millimeter			
Straight (S)	LAS 02	51	108	200	50	25	*	20
	LAS 03	76	108	250	50	25	*	20
	LAS 04	102	108	360	50	25	*	20
	LAS 05	127	138	455	50	20	*	20
	LAS 06	152	138	520	50	15	*	20
	LAS 08	203	138	600	50	12	*	20

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.