


Features

- Surface mounted system, designed for retrofit installation
- System allows minor seismic movements
- System allows excellent shear movements
- Design for pneumatic and solid tires
- Ideal for vehicular traffic depending upon gap width
- Vapor and Fire Barriers are optionally available

Straight Application MCS

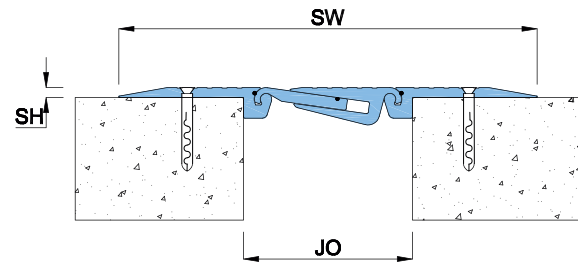

MC Series


EXT. Application

INT. Application

Seismic Movement

FLOOR USE

Corner Application MCC

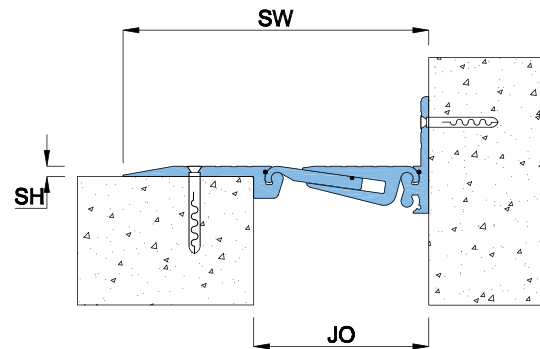

Details

Usage : Floor

Joint width : 1" - 4"

Optional : Vapor/Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Millimeter		Horizontal	
Straight (S)	MCS 01	25	4	201	10	10	Excellent	3.5
	MCS 02	51	4	201	10	10	Excellent	3.5
	MCS 03	76	6	226	10	10	Excellent	3.5
	MCS 04	102	6	252	15	15	Excellent	3.5
Corner (C)	MCC 01	25	4	126	10	10	Excellent	3.5
	MCC 02	51	4	126	10	10	Excellent	3.5
	MCC 03	76	6	151	10	10	Excellent	3.5
	MCC 04	102	6	177	15	15	Excellent	3.5

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.