
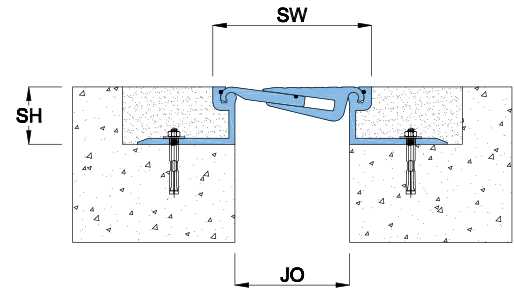


Features

- System designed to be installed in floor recess
- System allows minor seismic movements
- System allows excellent shear movements
- Design for pneumatic and solid tires
- Ideal for vehicular traffic depending upon gap width
- Vapor and Fire Barriers are optionally available

Straight Application MRS

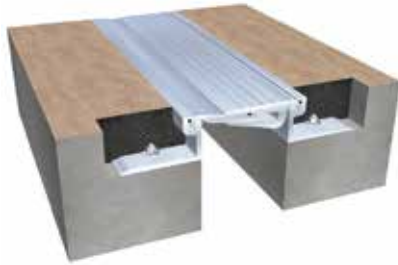

MR Series


EXT. Application

INT. Application

Seismic Movement

FLOOR USE

Corner Application MRC

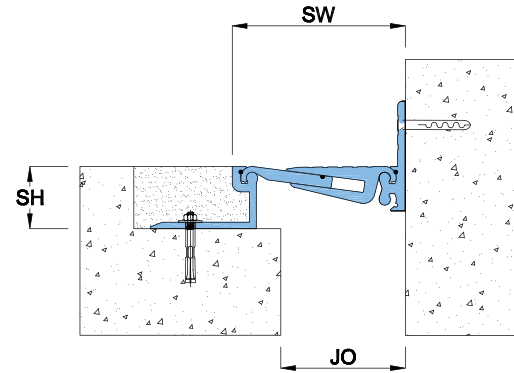

Details

Usage : Floor

Joint width : 1" - 4"

Optional : Vapor/Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Horizontal	Vertical	Shear	
Straight (S)	MRS 01	25	38	53	15	15	Excellent	3.5
	MRS 02	51	38	81	15	15	Excellent	3.5
	MRS 03	76	38	106	20	20	Excellent	3.5
	MRS 04	102	38	132	20	20	Excellent	3.5
Corner (C)	MRC 01	25	38	53	15	15	Excellent	3.5
	MRC 02	51	38	81	15	15	Excellent	3.5
	MRC 03	76	38	106	20	20	Excellent	3.5
	MRC 04	102	38	132	20	20	Excellent	3.5

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.